








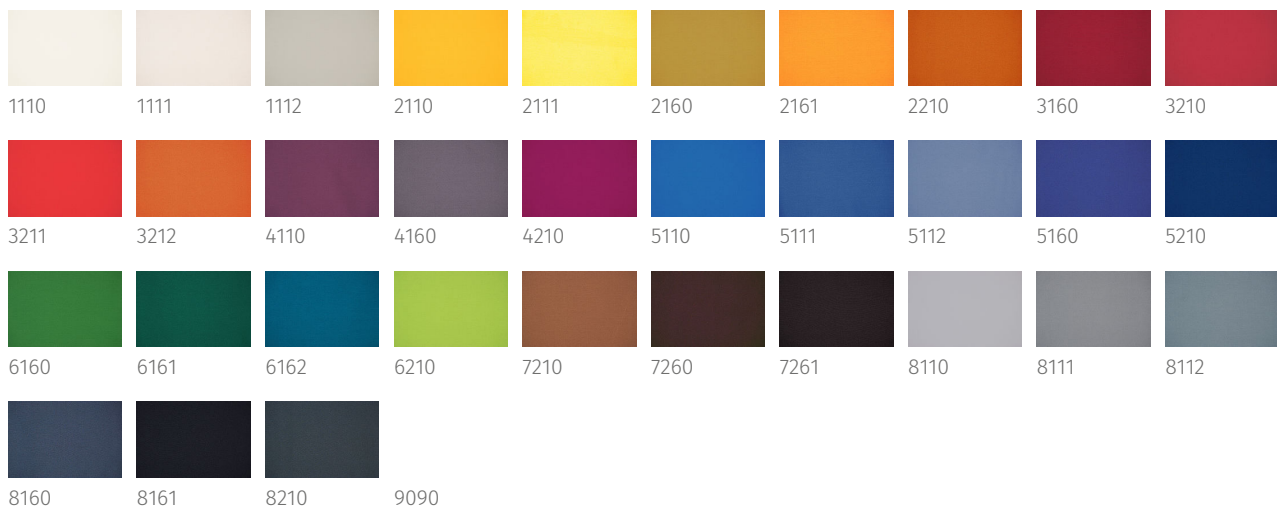

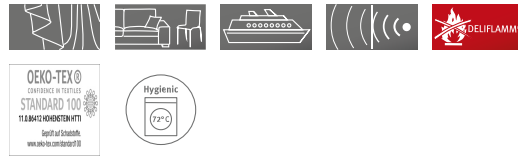

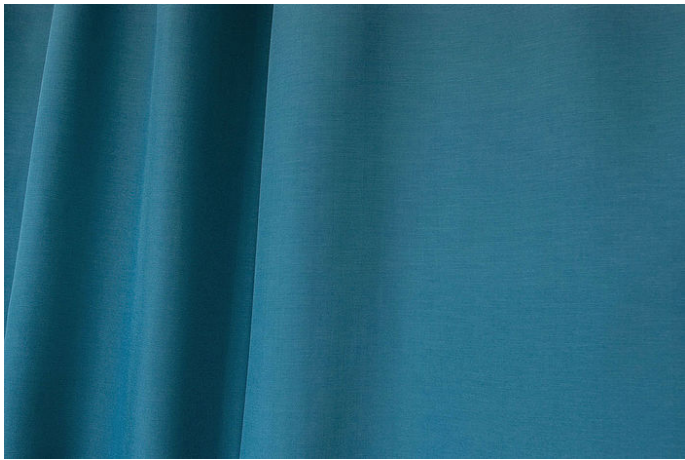

# Platus

Article Number 27685



Width	150 cm
Weight	240 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867, TYP B, IMO Res. A471 (XII), Flammability performance is dependant on the foam used.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5
Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %

Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	40000
Pilling DIN EN ISO 12945-2	note 3-4 at 2000 rubs
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.65
Sound absorption class	C
Care	    
Care Health & Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.