









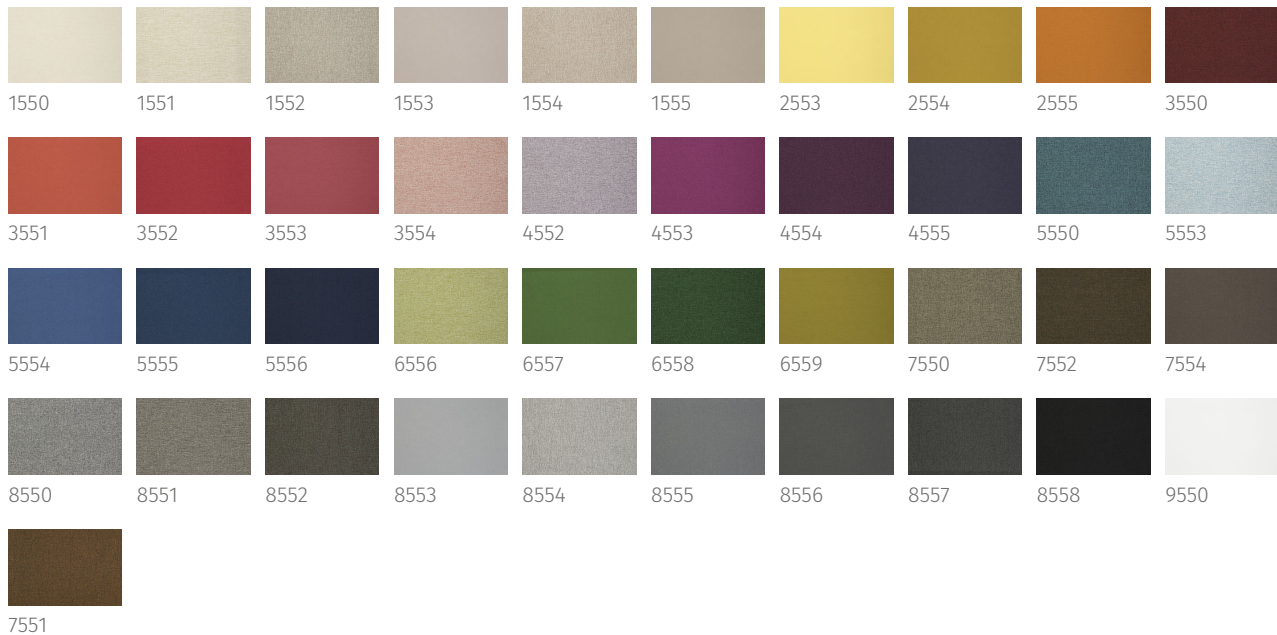

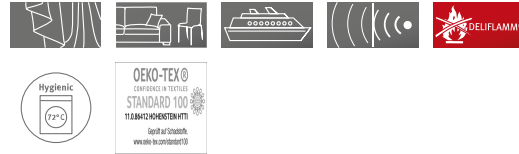

## Luma

Article Number 29873



Width	300 cm
Weight	280 g/m <sup>2</sup>
Repeat	no repeat
Composition	100% Polyester FR
Flame resistance	DIN 4102/B1, DIN EN 1021 Teil 1, DIN EN 1021 Teil 2, M1, BS 5867, TYP B, BS 5852 Crib 5, IMO Res. A471 (XII), IMO Res. A652 (16), NFPA260, NFPA701, Cal_TB_117, EN 13773, C1, Flammability performance is dependant on the foam used.
Light fastness	5-6
Wash fastness 40°C DIN EN ISO 105 C10	note 4-5
Wash fastness 60°C DIN EN ISO 105 C10	note 4-5

Fabric relaxing washing 40°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-1%, weft approx. +/-1 %
Fabric relaxing washing 60°C DIN EN ISO 6330 DIN EN ISO 5077	warp approx. +/-2%, weft approx. +/-1 %
Fabric relaxing dry clean DIN EN ISO 3175-1	warp approx. +/-1%, weft approx. +/-1 %
Rub fastness DIN EN ISO 105-X12	dry: note 4-5, wet: note 4-5
Abrasion to Martindale DIN EN ISO 12947-2 DIN EN 14465-2006	50000
Pilling DIN EN ISO 12945-2	note 4-5 at 2000 rubs
Measured sound absorption coefficient DIN EN ISO 354/DIN EN ISO 11654	0.75
Sound absorption class	C
Care	    
Care Health & Care	    

The above technical data are average values. These values only describe the technical characteristics and the chemical composition of the delivered goods. Warranties are not given.